

PRESENTED BY

POLO-CLIP HS. WITH QUALITY LIKE THIS, YOU'LL BE COMING BACK FOR MORE!
POLO-KAL 3S/NG - THE HIGHLY / NOISE-INSULATED HOUSEHOLD DISCHARGE PROGRAMMES

PLEASE READ AND FOLLOW OUR TECHNICAL PRODUCT INFORMATION LITERATURE.

POLOPLAST. A WIETERSDORFER GROUP COMPANY.





POLOPLAST GMBH & CO. KG
A-4060 LEONDING
POSTFACH 1
POLOPLAST-STRASSE 1
TEL +43 (0) 732/38 86-0
FAX +43 (0) 732/38 86-9
OFFICE@POLOPLAST.COM
WWW.POLOPLAST.COM

POLOPLAST GMBH
D-87640 EBENHOFEN
KIRNACHSTRASSE 17
TEL +49(0) 83 42 / 70 06-0
FAX +49(0) 83 42 / 70 06-66
INFO@POLOPLAST.COM
WWW.POLOPLAST.COM




1/03.05/3000 Fölscher, Scherhuber...www.fs-linz.at

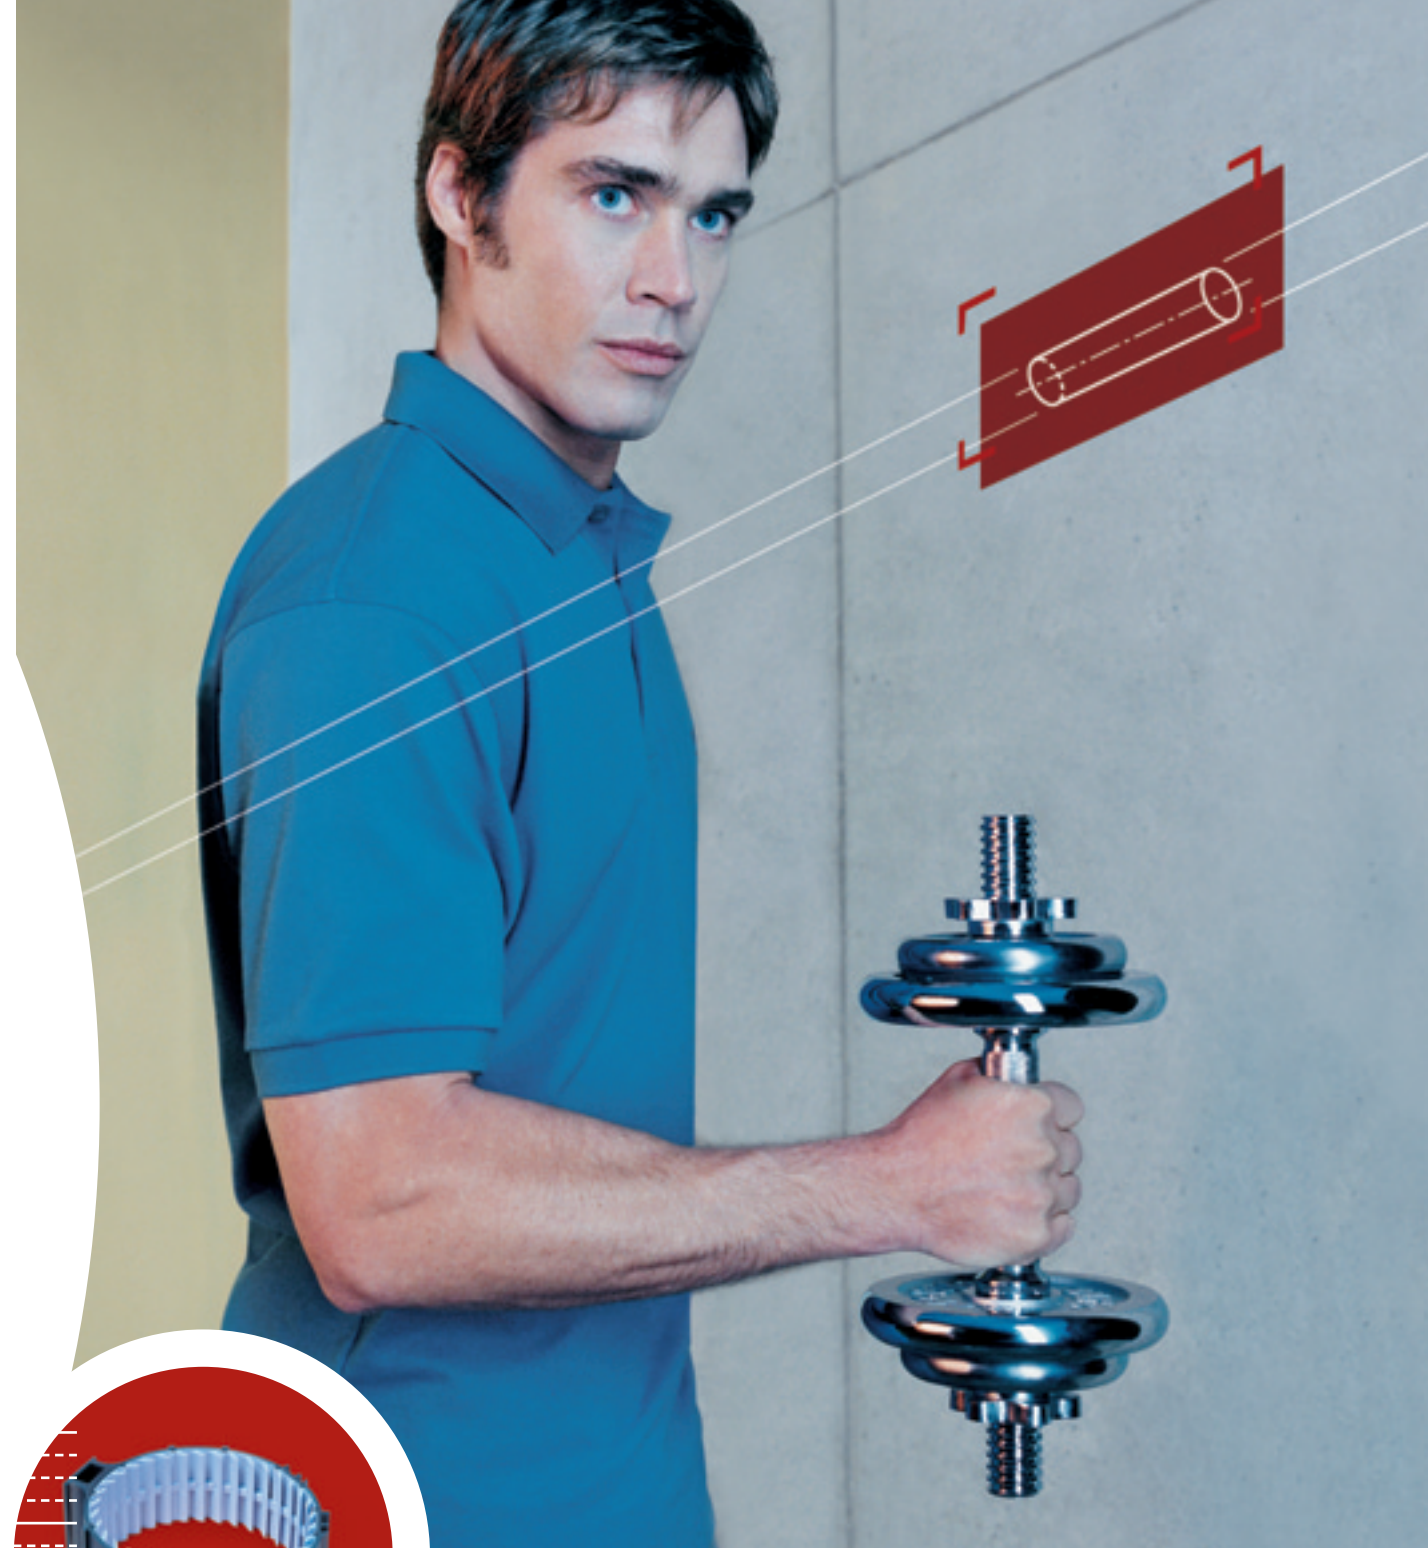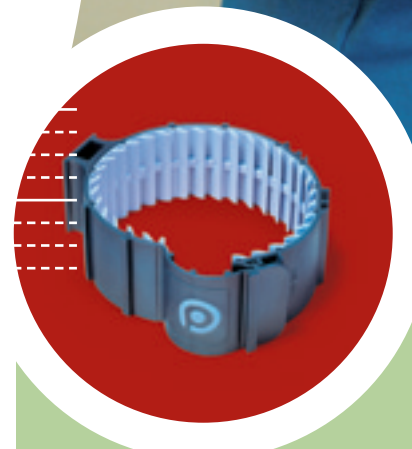

POLO-CLIP HS
HIGHLY NOISE-INSULATED
PIPE FASTENING SYSTEM


POLO-CLIP
PIPE FASTENING SYSTEM



© Copyright. All contents and illustrations are copyrighted and may not be reproduced, published or disseminated - even in revised form - without the express written consent of POLOPLAST.

POLO-CLIP HS

HIGHLY NOISE-INSULATED
PIPE FASTENING SYSTEM

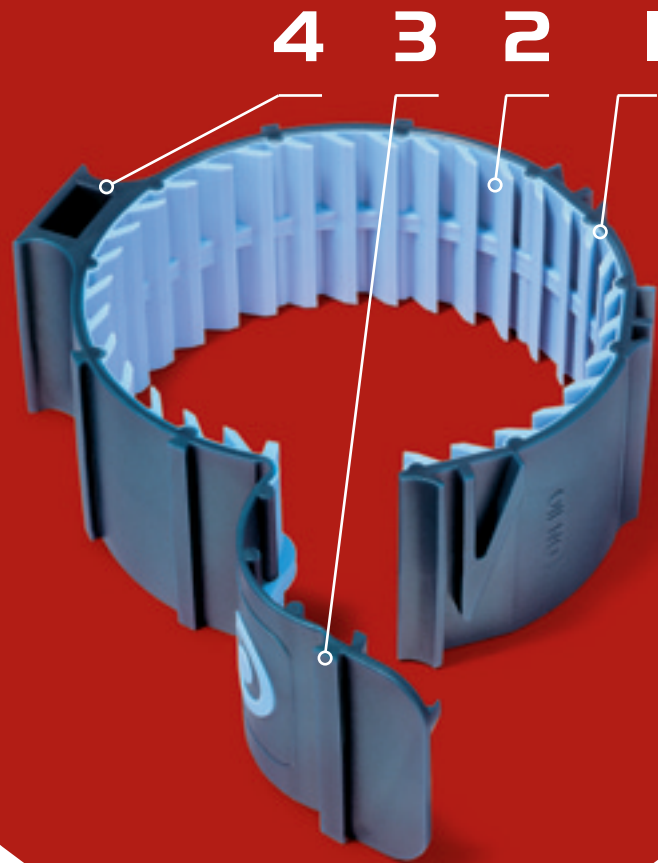

1) 2-COMPONENT-TECHNOLOGY. The entire body of the bracket, consisting of high-strength PP and soft TPE, is manufactured in one single operation. The optimally coordinated materials and special constructional design of the POLO-CLIP HS make not only for outstanding sound absorbency, but also for strength, ease of handling and rapid assembly.

2) TPE RIBBING. It is the soft ribs that give the POLO-CLIP HS its highly sound-absorbing effect. Acoustic decoupling is brought about by the angled pitch of the ribs, and by the air cushions between them.


3) CLOSURE. The new V-shaped closure mechanism of the POLO-CLIP HS bracket ensures secure fastening, at the same time as preventing uncontrolled pipe deformation.

4) BRACKET BASE. Either an M8 or an M10 nut is inlaid into the base of the bracket. The bracket can be mounted to walls and ceilings using either a hanger bolt (2 different sizes possible) or a threaded bolt plus two-hole baseplate.

(SILENT NIGHT) DESIGNED FOR OPTIMUM COMPATIBILITY WITH POLO-PLAST'S POLO-KAL NG AND POLO-KAL 3S HOUSEHOLD DISCHARGE PROGRAMMES, THE HIGHLY NOISE-INSULATED POLO-CLIP HS PIPE BRACKET HELPS YOU ENJOY THE COMFORT OF YOUR OWN FOUR WALLS – BY MUFFLING ALL FLUSHING NOISES FROM WITHIN THEM!



THE POLO-CLIP HS DELIVERS SIGNIFICANT FURTHER INCREASES IN THE SOUND-DAMPENING PERFORMANCE OF THE POLO-KAL NG NOISE-INSULATED HOUSEHOLD DISCHARGE PIPING SYSTEM, AND EVEN OF THE ALREADY HIGHLY NOISE-INSULATED POLO-KAL 3S SYSTEM. IN AN INTENSIVE DEVELOPMENT EFFORT, THE POLO-CLIP HS BRACKET WAS DESIGNED FOR MAXIMUM COMPATIBILITY WITH THE ACOUSTIC BEHAVIOUR OF THE PLASTICS USED AND OF THE 3-LAYER TECHNOLOGY EMPLOYED IN THE POLOPLAST PIPING SYSTEMS.

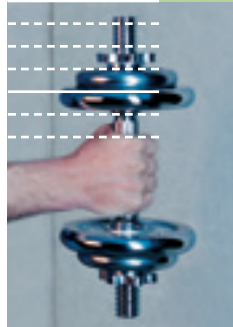

POLO-CLIP HS DN/OD 110 – EASY TO SHORTEN TO DN/OD 90 AND DN/OD 75


(3 IN 1) The POLO-CLIP HS pipe bracket means that a highly noise-insulated fastening system is now available for 3 nominal diameters of pipe (DN/OD 110*), DN/OD 90, DN/OD 75). POLO-CLIP HS is used “as standard” on DN 110 pipes. Where pipes with nominal diameters of DN/OD 90 or DN/OD 75 are used, the POLO-CLIP HS can easily be shortened to fit: Simply cut off the body of the bracket at the appropriate points marked, using a suitable cutting tool.



INNOVATIVE CLOSURE MECHANISM

(PRESS, PUSH – THAT'S IT) Thanks to its new V-shaped closure system, the POLO-CLIP HS bracket is simplicity itself to close – two quick and easy moves are all it takes to fix the pipe securely.

SUCCESS IN SERIES: 3 POLO-CLIP BRACKETS TO ROUND OFF THE POLOPLAST PIPE-FASTENING RANGE

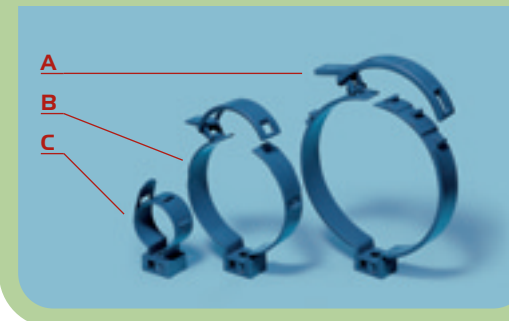

ONE IDEA, THREE VERSIONS, SEVEN SOLUTIONS

3 POLO-CLIP pipe brackets ensure secure fastening for 7 nominal diameters of soil-waste pipes.

POLO-CLIP BRACKET FOR NOMINAL DIAMETERS:

- A_ DN/OD 160 and DN/OD 125
- B_ DN/OD 110 and DN/OD 75
- C_ DN/OD 50, DN/OD 40 and DN/OD 32